



Masonry Sealer



MASONS™ Masonry Sealer is an oligomeric siloxane modified silicone resin based non-film forming clear sealer, formulated for cement and clay based products. It's unique penetrating properties are designed to provide excellent water repellency without appreciably changing the surface appearance of the treated area giving minimal visual effect.

Uses

MASONS™ Masonry Sealer, is formulated for optimum exterior performance and can be used on all mineral - based interior and exterior building products including, concrete walls and driveways, plaster and mortar finishes, stone and marble floor and wall tiles, and cement fibre boards. Designed for vertical application and also suitable for vehicle traffic.


Advantages

- Does not alter the colour or visual appearance of the treated surface
- The water repelling properties facilitate ease of cleaning, hindering liquid stain penetration and induces the materials non-slip properties
- Non-yellowing and UV resistant
- Allows concrete to breath
- Suitable for vehicle traffic

Description	Size	Code
Masonry Sealer 5 Lt	5 Lt	MS005
Masonry Sealer 20 Lt	20 Lt	MS020



Masonry Sealer

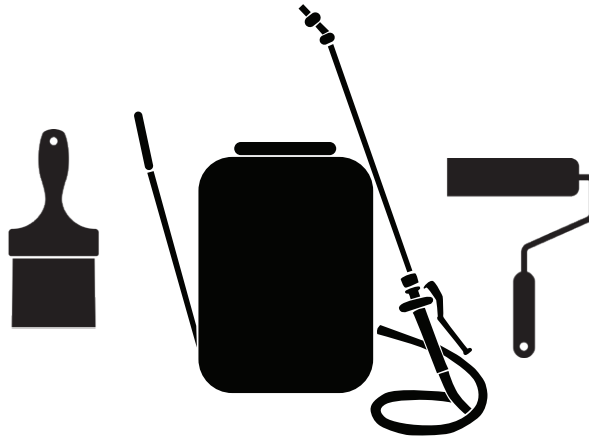

Application

- MASONS™ Masonry Sealer, is supplied ready for use and can be applied by brush or roller.
- It may also be applied by low pressure spraying, but care must be taken to minimize flooding and runs.
- Coverage rate is 10-12 square metres of surface per litre and two coats wet on wet are recommended for best performance.

Limitations

Has a solvent odour when curing.

Although MASONS™ Masonry Sealer, starts to act as soon as the treated surface is dry, it takes 24 hours to gain maximum properties.

Precautions

Do not apply in damp conditions or when temperature is below 10oc. If using PlastaSeal as a sealer over new plaster prior to painting allow at least 7 days curing of the plaster prior to painting.

Technical Service

For your nearest stockist or additional technical information on MASONS™ products and our wide range of sealing compounds, concrete admixtures and additives for the construction industry, contact MASONS™ on 0800 522 5333.

The above information is based on our best knowledge and presented in good faith and we believe it to be true and accurate, however, due to the variable nature of application the suitability of the product for the intended use is the sole responsibility of the user.